

DSC291: Machine Learning with Few Labels

Reinforcement learning

Zhiting Hu

Lecture 18, February 22, 2023

UC San Diego

HALICIOĞLU DATA SCIENCE INSTITUTE

Recap:

- Q-learning:
 - Value-based
 - learns Q-value function
 - Off-policy
 - E.g., replay memory

- Policy Gradient:
 - Policy-based
 - Learns policy itself
 - On-policy

Recap: REINFORCE algorithm

Mathematically, we can write:

$$\begin{aligned} J(\theta) &= \mathbb{E}_{\tau \sim p(\tau; \theta)} [r(\tau)] \\ &= \int_{\tau} r(\tau) p(\tau; \theta) d\tau \end{aligned}$$

Where $r(\tau)$ is the reward of a trajectory $\tau = (s_0, a_0, r_0, s_1, \dots)$

Recap: REINFORCE algorithm

Expected reward: $J(\theta) = \mathbb{E}_{\tau \sim p(\tau; \theta)} [r(\tau)]$

$$= \int_{\tau} r(\tau) p(\tau; \theta) d\tau$$

Now let's differentiate this: $\nabla_{\theta} J(\theta) = \int_{\tau} r(\tau) \nabla_{\theta} p(\tau; \theta) d\tau$

Intractable! Gradient of an expectation is problematic when p depends on θ

However, we can use a nice trick: $\nabla_{\theta} p(\tau; \theta) = p(\tau; \theta) \frac{\nabla_{\theta} p(\tau; \theta)}{p(\tau; \theta)} = p(\tau; \theta) \nabla_{\theta} \log p(\tau; \theta)$

If we inject this back:

$$\begin{aligned} \nabla_{\theta} J(\theta) &= \int_{\tau} (r(\tau) \nabla_{\theta} \log p(\tau; \theta)) p(\tau; \theta) d\tau \\ &= \mathbb{E}_{\tau \sim p(\tau; \theta)} [r(\tau) \nabla_{\theta} \log p(\tau; \theta)] \end{aligned}$$

Can estimate with Monte Carlo sampling

Recap: REINFORCE algorithm

$$\begin{aligned}\nabla_{\theta} J(\theta) &= \int_{\tau} (r(\tau) \nabla_{\theta} \log p(\tau; \theta)) p(\tau; \theta) d\tau \\ &= \mathbb{E}_{\tau \sim p(\tau; \theta)} [r(\tau) \nabla_{\theta} \log p(\tau; \theta)]\end{aligned}$$

Can we compute those quantities without knowing the transition probabilities?

We have: $p(\tau; \theta) = \prod_{t \geq 0} p(s_{t+1} | s_t, a_t) \pi_{\theta}(a_t | s_t)$

Thus: $\log p(\tau; \theta) = \sum_{t \geq 0} \log p(s_{t+1} | s_t, a_t) + \log \pi_{\theta}(a_t | s_t)$

And when differentiating: $\nabla_{\theta} \log p(\tau; \theta) = \sum_{t \geq 0} \nabla_{\theta} \log \pi_{\theta}(a_t | s_t)$

Doesn't depend on
transition probabilities!

Therefore when sampling a trajectory τ , we can estimate $J(\theta)$ with

$$\nabla_{\theta} J(\theta) \approx \sum_{t \geq 0} r(\tau) \nabla_{\theta} \log \pi_{\theta}(a_t | s_t)$$

Intuition

Gradient estimator: $\nabla_{\theta} J(\theta) \approx \sum_{t \geq 0} r(\tau) \nabla_{\theta} \log \pi_{\theta}(a_t | s_t)$

Interpretation:

- If $r(\tau)$ is high, push up the probabilities of the actions seen
- If $r(\tau)$ is low, push down the probabilities of the actions seen

Intuition

Gradient estimator: $\nabla_{\theta} J(\theta) \approx \sum_{t \geq 0} r(\tau) \nabla_{\theta} \log \pi_{\theta}(a_t | s_t)$

Interpretation:

- If $r(\tau)$ is high, push up the probabilities of the actions seen
- If $r(\tau)$ is low, push down the probabilities of the actions seen

Might seem simplistic to say that if a trajectory is good then all its actions were good. **But in expectation, it averages out!**

Intuition

Gradient estimator:
$$\nabla_{\theta} J(\theta) \approx \sum_{t \geq 0} r(\tau) \nabla_{\theta} \log \pi_{\theta}(a_t | s_t)$$

Interpretation:

- If $r(\tau)$ is high, push up the probabilities of the actions seen
- If $r(\tau)$ is low, push down the probabilities of the actions seen

Might seem simplistic to say that if a trajectory is good then all its actions were good. **But in expectation, it averages out!**

However, this also suffers from high variance because credit assignment is really hard. Can we help the estimator?

Variance reduction

Gradient estimator: $\nabla_{\theta} J(\theta) \approx \sum_{t \geq 0} r(\tau) \nabla_{\theta} \log \pi_{\theta}(a_t | s_t)$

Variance reduction

Gradient estimator:
$$\nabla_{\theta} J(\theta) \approx \sum_{t \geq 0} r(\tau) \nabla_{\theta} \log \pi_{\theta}(a_t | s_t)$$

First idea: Push up probabilities of an action seen, only by the cumulative future reward from that state

$$\nabla_{\theta} J(\theta) \approx \sum_{t \geq 0} \left(\sum_{t' \geq t} r_{t'} \right) \nabla_{\theta} \log \pi_{\theta}(a_t | s_t)$$

Variance reduction

Gradient estimator: $\nabla_{\theta} J(\theta) \approx \sum_{t \geq 0} r(\tau) \nabla_{\theta} \log \pi_{\theta}(a_t | s_t)$

First idea: Push up probabilities of an action seen, only by the cumulative future reward from that state

$$\nabla_{\theta} J(\theta) \approx \sum_{t \geq 0} \left(\sum_{t' \geq t} r_{t'} \right) \nabla_{\theta} \log \pi_{\theta}(a_t | s_t)$$

Second idea: Use discount factor γ to ignore delayed effects

$$\nabla_{\theta} J(\theta) \approx \sum_{t \geq 0} \left(\sum_{t' \geq t} \gamma^{t'-t} r_{t'} \right) \nabla_{\theta} \log \pi_{\theta}(a_t | s_t)$$

Variance reduction: Baseline

Problem: The raw value of a trajectory isn't necessarily meaningful. For example, if rewards are all positive, you keep pushing up probabilities of actions.

What is important then? Whether a reward is better or worse than what you expect to get

Idea: Introduce a baseline function dependent on the state.
Concretely, estimator is now:

$$\nabla_{\theta} J(\theta) \approx \sum_{t \geq 0} \left(\sum_{t' \geq t} \gamma^{t'-t} r_{t'} - b(s_t) \right) \nabla_{\theta} \log \pi_{\theta}(a_t | s_t)$$

How to choose the baseline?

$$\nabla_{\theta} J(\theta) \approx \sum_{t \geq 0} \left(\sum_{t' \geq t} \gamma^{t'-t} r_{t'} - b(s_t) \right) \nabla_{\theta} \log \pi_{\theta}(a_t | s_t)$$

A simple baseline: constant moving average of rewards experienced so far from all trajectories

How to choose the baseline?

$$\nabla_{\theta} J(\theta) \approx \sum_{t \geq 0} \left(\sum_{t' \geq t} \gamma^{t'-t} r_{t'} - b(s_t) \right) \nabla_{\theta} \log \pi_{\theta}(a_t | s_t)$$

A simple baseline: constant moving average of rewards experienced so far from all trajectories

Variance reduction techniques seen so far are typically used in “Vanilla REINFORCE”

How to choose the baseline?

A better baseline: Want to push up the probability of an action from a state, if this action was better than the **expected value of what we should get from that state**.

Q: What does this remind you of?

How to choose the baseline?

A better baseline: Want to push up the probability of an action from a state, if this action was better than the **expected value of what we should get from that state**.

Q: What does this remind you of?

A: Q-function and value function!

How to choose the baseline?

A better baseline: Want to push up the probability of an action from a state, if this action was better than the **expected value of what we should get from that state**.

Q: What does this remind you of?

A: Q-function and value function!

Intuitively, we are happy with an action a_t in a state s_t if $Q^\pi(s_t, a_t) - V^\pi(s_t)$ is large. On the contrary, we are unhappy with an action if it's small.

How to choose the baseline?

A better baseline: Want to push up the probability of an action from a state, if this action was better than the **expected value of what we should get from that state**.

Q: What does this remind you of?

A: Q-function and value function!

Intuitively, we are happy with an action a_t in a state s_t if $Q^\pi(s_t, a_t) - V^\pi(s_t)$ is large. On the contrary, we are unhappy with an action if it's small.

Using this, we get the estimator:
$$\nabla_\theta J(\theta) \approx \sum_{t \geq 0} (Q^{\pi_\theta}(s_t, a_t) - V^{\pi_\theta}(s_t)) \nabla_\theta \log \pi_\theta(a_t | s_t)$$

Actor-Critic Algorithm

Problem: we don't know Q and V. Can we learn them?

Yes, using Q-learning! We can combine Policy Gradients and Q-learning by training both an **actor** (the policy) and a **critic** (the Q-function).

- The actor decides which action to take, and the critic tells the actor how good its action was and how it should adjust
- Also alleviates the task of the critic as it only has to learn the values of (state, action) pairs generated by the policy
- Can also incorporate Q-learning tricks e.g. experience replay
- **Remark:** we can define by the **advantage function** how much an action was better than expected

$$A^\pi(s, a) = Q^\pi(s, a) - V^\pi(s)$$

Actor-Critic Algorithm

Initialize policy parameters θ , critic parameters ϕ

For iteration=1, 2 ... **do**

Sample m trajectories under the current policy

$\Delta\theta \leftarrow 0$

For $i=1, \dots, m$ **do**

For $t=1, \dots, T$ **do**

$$A_t = \sum_{t' \geq t} \gamma^{t'-t} r_{t'}^i - V_{\phi}(s_t^i)$$

$$\Delta\theta \leftarrow \Delta\theta + A_t \nabla_{\theta} \log(a_t^i | s_t^i)$$

$$\Delta\phi \leftarrow \sum_i \sum_t \nabla_{\phi} \|A_t^i\|^2$$

$$\theta \leftarrow \alpha \Delta\theta$$

$$\phi \leftarrow \beta \Delta\phi$$

End for

REINFORCE in action: Recurrent Attention Model (RAM)

Objective: Image Classification


Take a sequence of “glimpses” selectively focusing on regions of the image, to predict class

- Inspiration from human perception and eye movements
- Saves computational resources => scalability
- Able to ignore clutter / irrelevant parts of image

State: Glimpses seen so far

Action: (x,y) coordinates (center of glimpse) of where to look next in image

Reward: 1 at the final timestep if image correctly classified, 0 otherwise

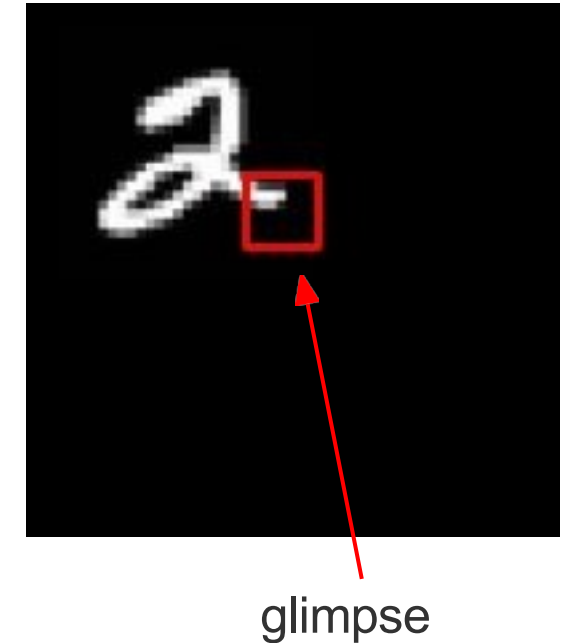

[Mnih et al. 2014]

REINFORCE in action: Recurrent Attention Model (RAM)

Objective: Image Classification


Take a sequence of “glimpses” selectively focusing on regions of the image, to predict class

- Inspiration from human perception and eye movements
- Saves computational resources => scalability
- Able to ignore clutter / irrelevant parts of image

State: Glimpses seen so far

Action: (x,y) coordinates (center of glimpse) of where to look next in image


Reward: 1 at the final timestep if image correctly classified, 0 otherwise

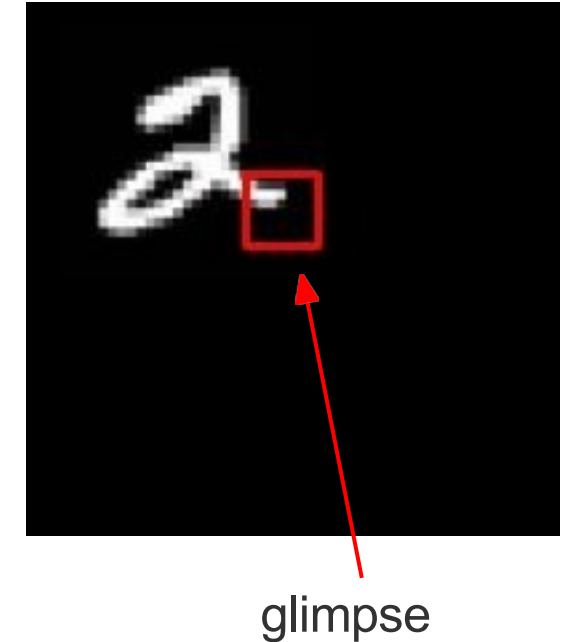

Glimpsing is a non-differentiable operation => learn policy for how to take glimpse actions using REINFORCE
Given state of glimpses seen so far, use RNN to model the state and output next action


[Mnih et al. 2014]

REINFORCE in action: Recurrent Attention Model (RAM)

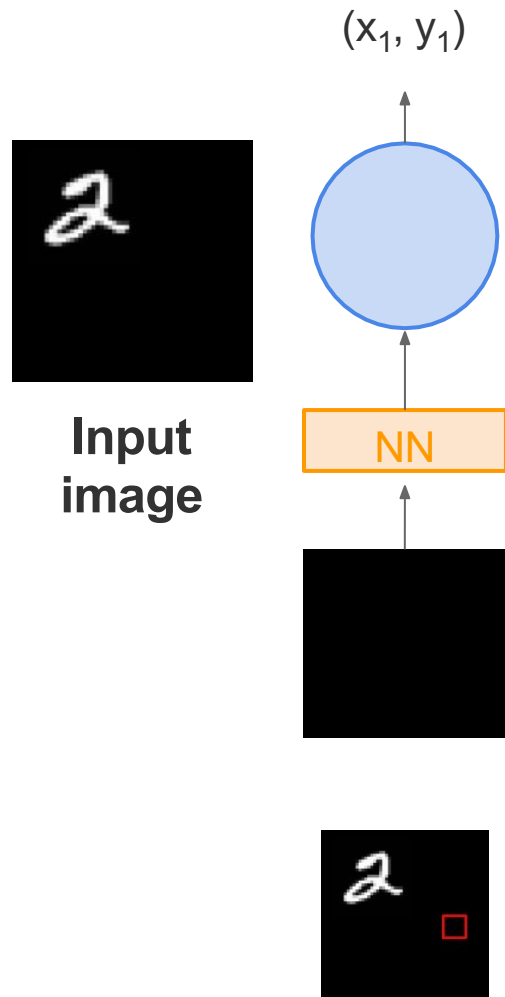


[Mnih et al. 2014]

REINFORCE in action: Recurrent Attention Model (RAM)

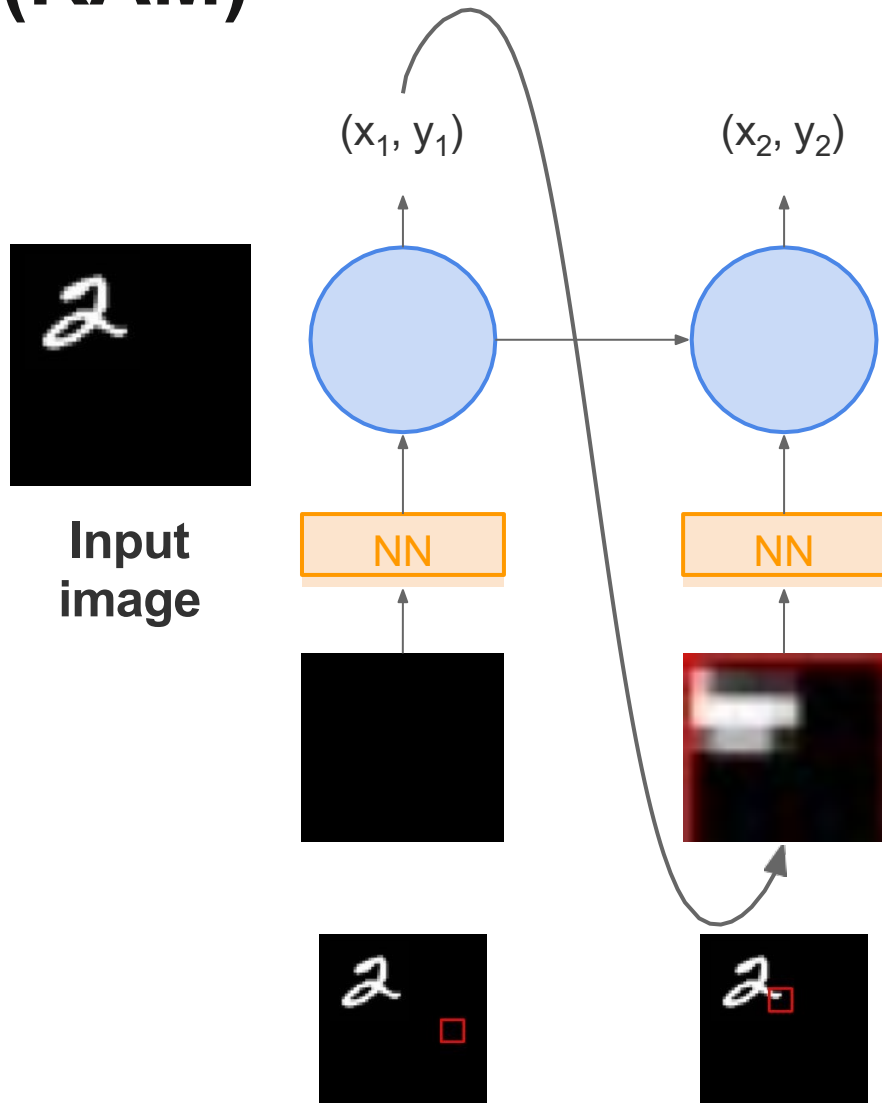


[Mnih et al. 2014]

REINFORCE in action: Recurrent Attention Model (RAM)

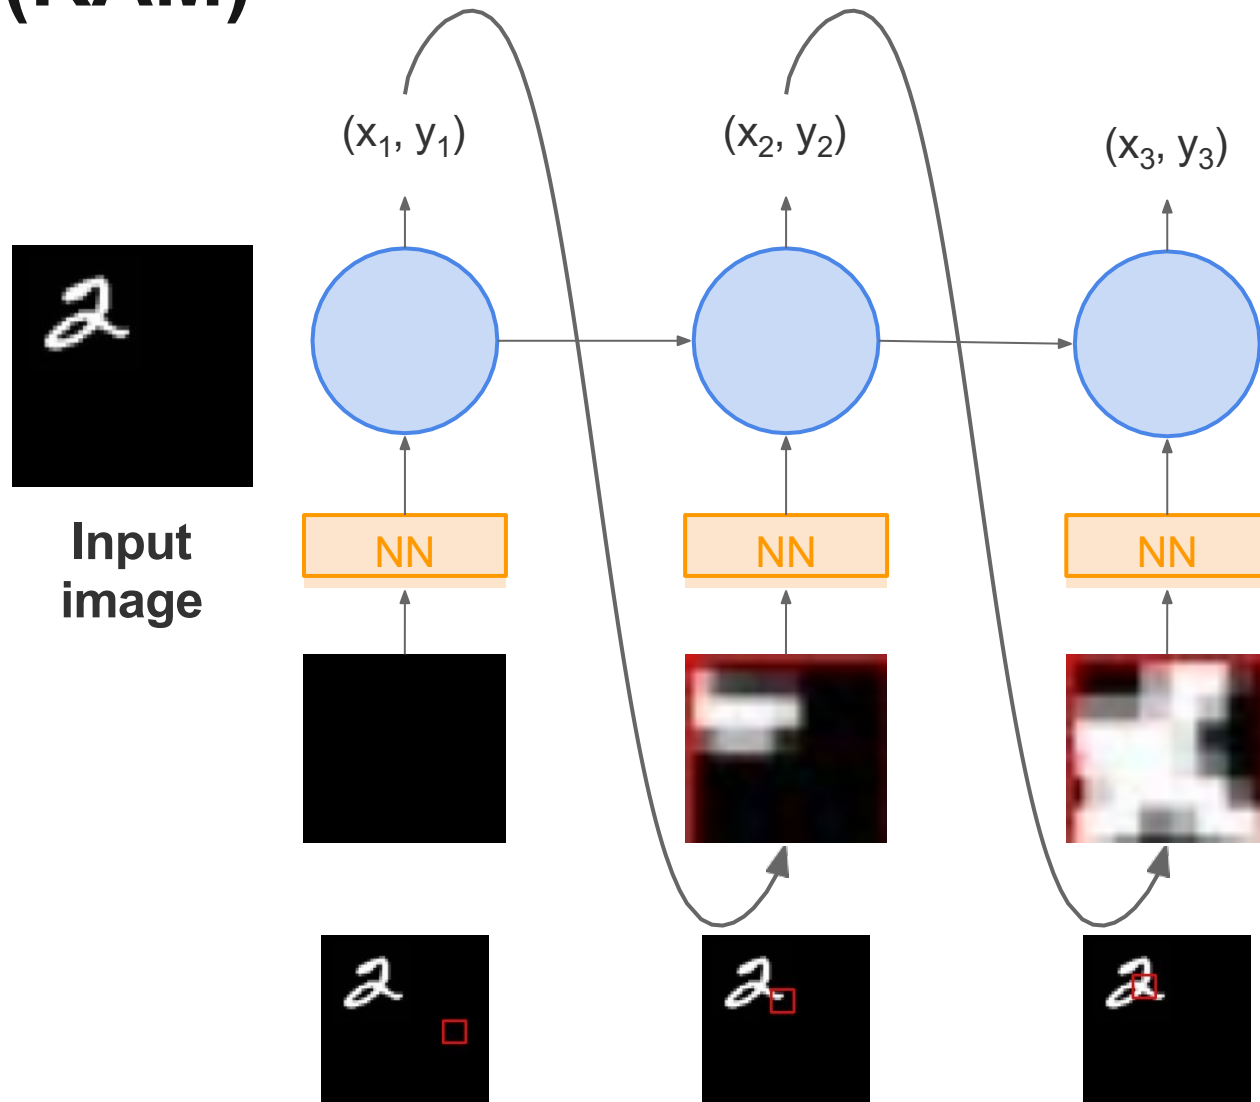


[Mnih et al. 2014]

REINFORCE in action: Recurrent Attention Model (RAM)

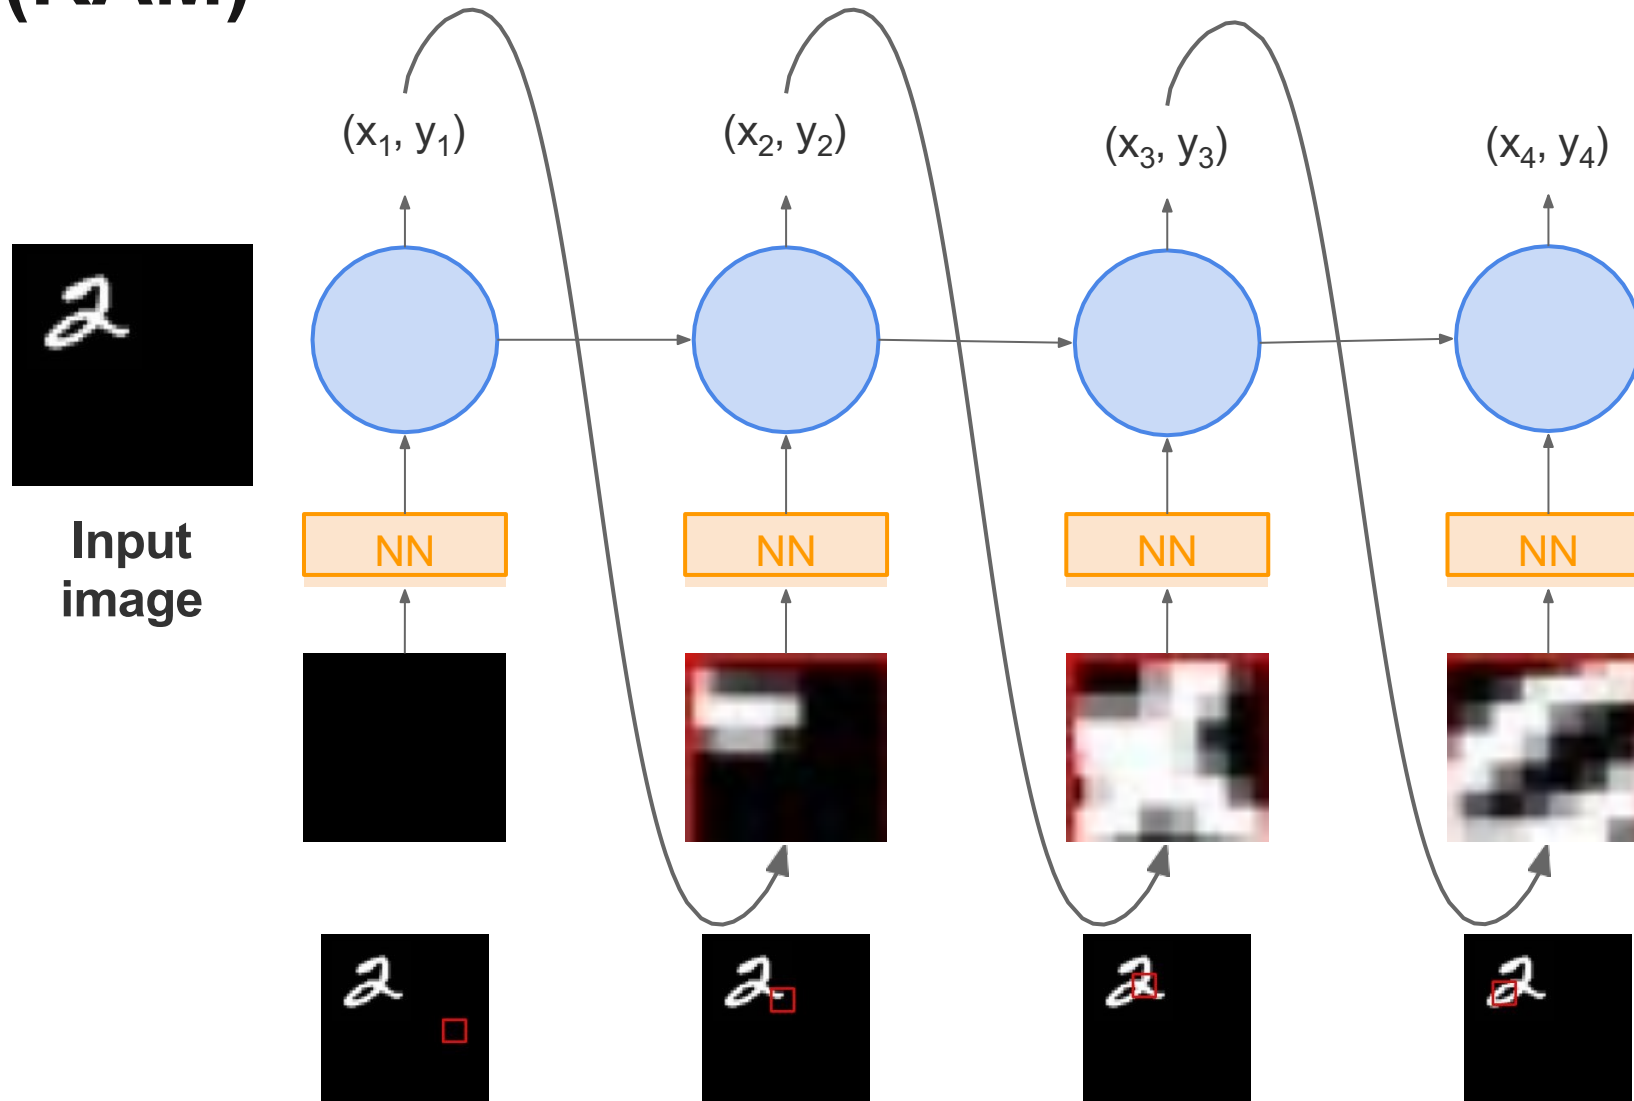


[Mnih et al. 2014]

REINFORCE in action: Recurrent Attention Model (RAM)

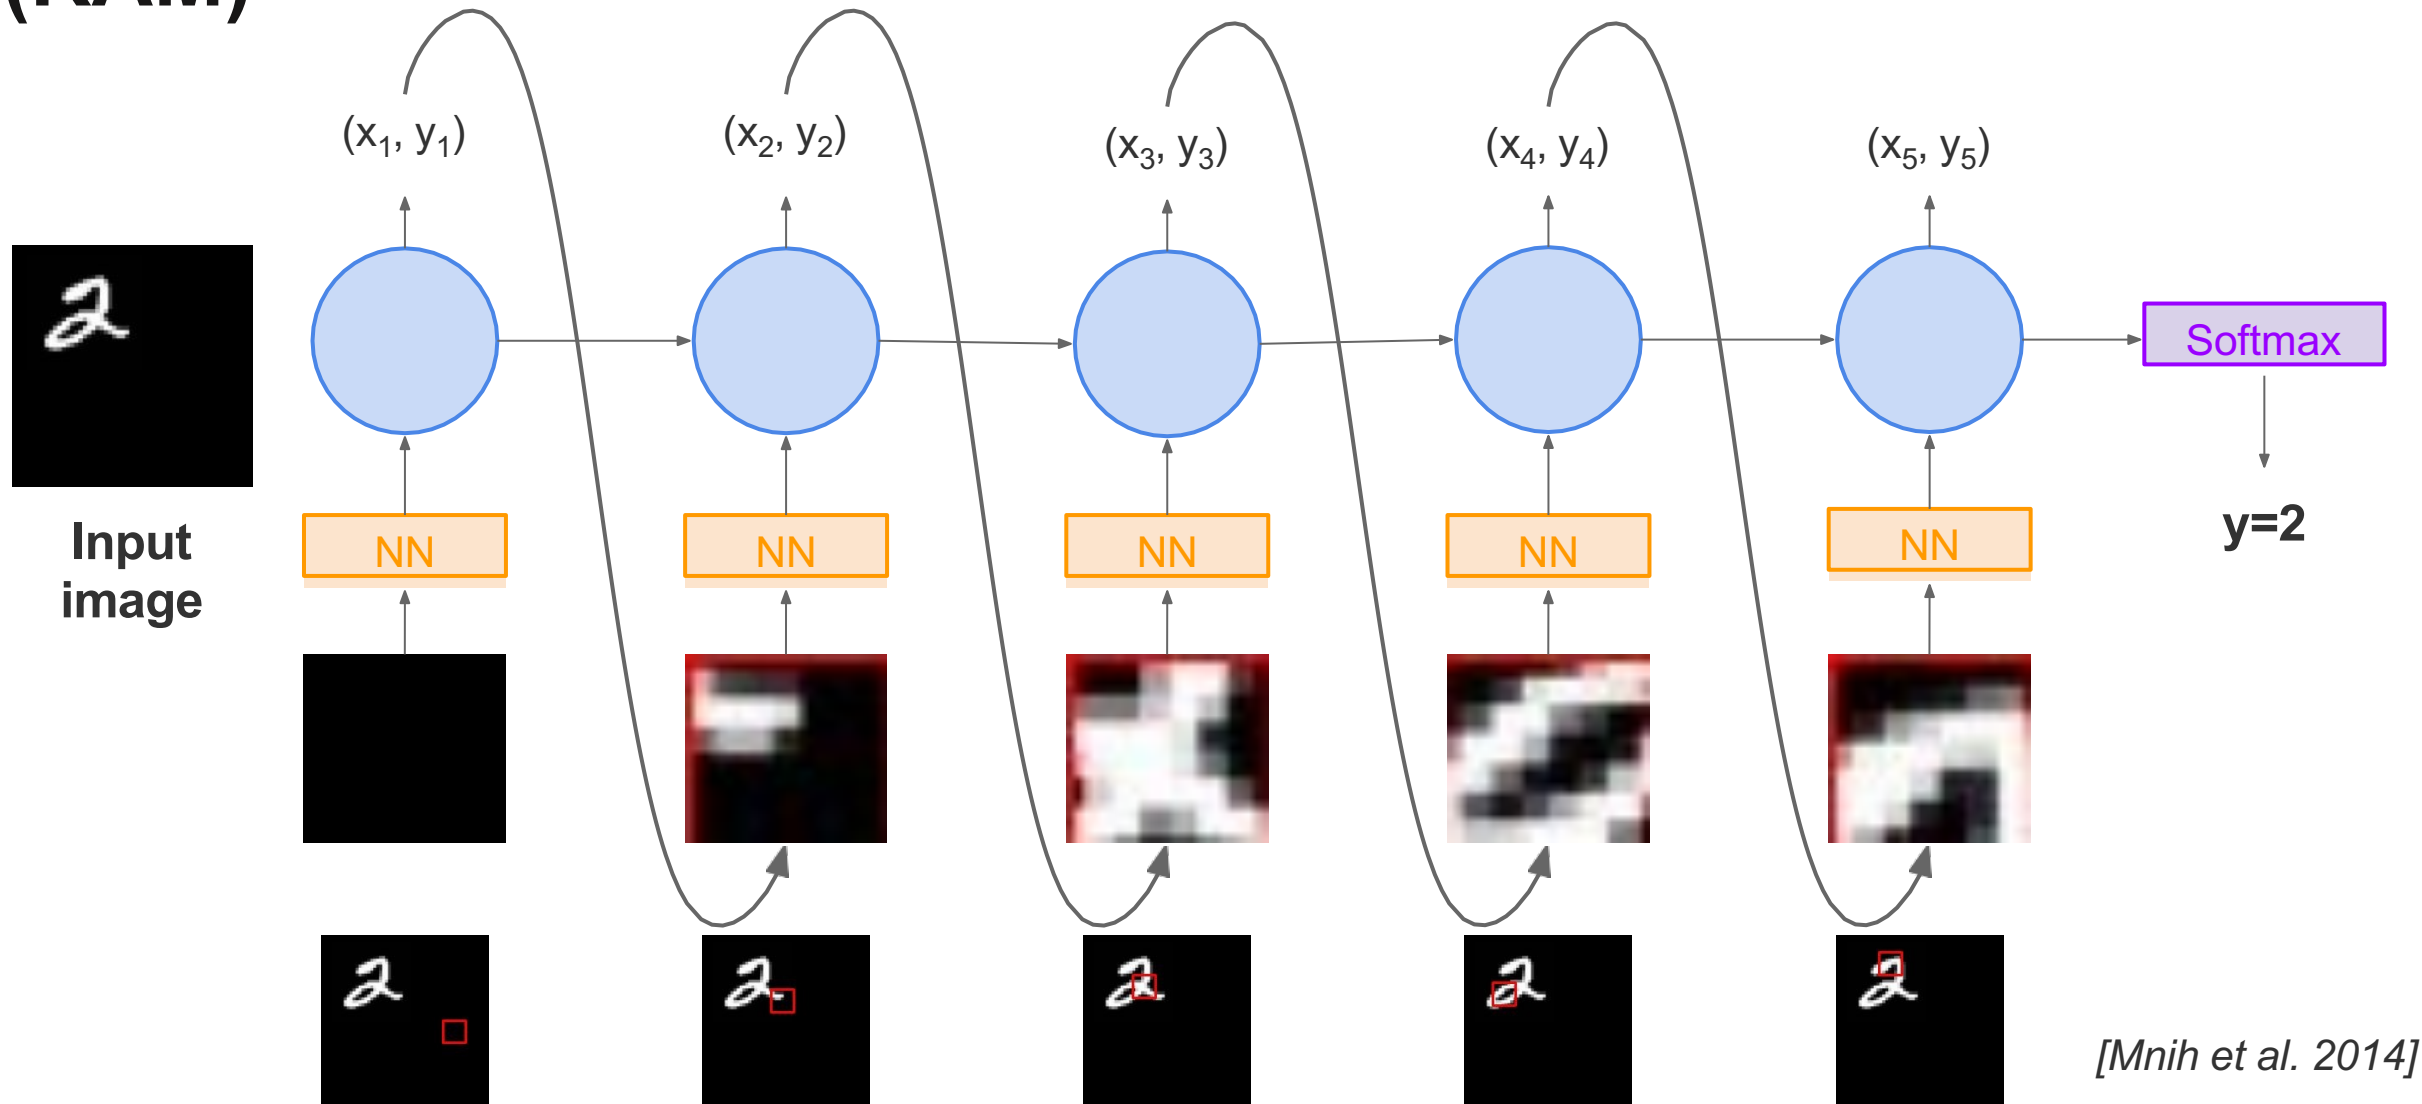

REINFORCE in action: Recurrent Attention Model (RAM)

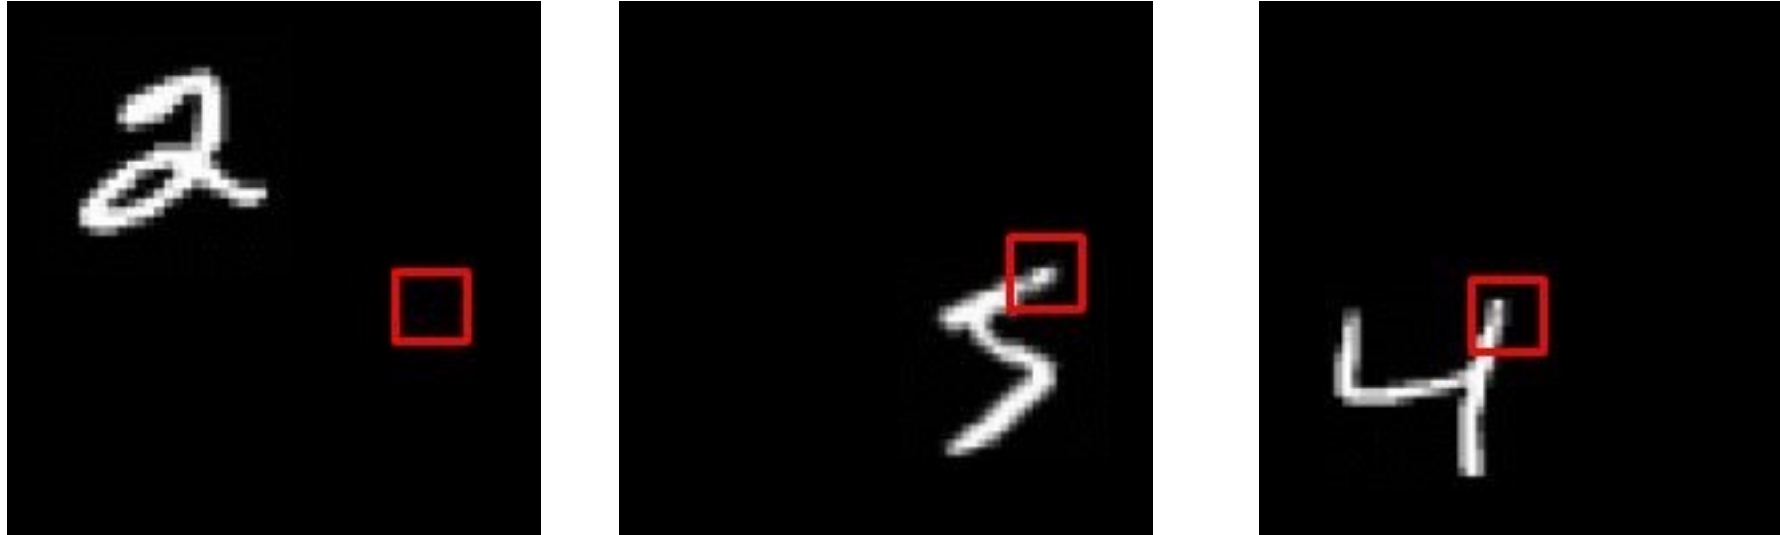

Has also been used in many other tasks including fine-grained image recognition, image captioning, and visual question-answering!

[Mnih et al. 2014]


More policy gradients: AlphaGo

Overview:

- Mix of supervised learning and reinforcement learning
- Mix of old methods (Monte Carlo Tree Search) and recent ones (deep RL)

How to beat the Go world champion:

- Featurize the board (stone color, move legality, bias, ...)
- Initialize policy network with supervised training from professional go games, then continue training using policy gradient (play against itself from random previous iterations, +1 / -1 reward for winning / losing)
- Also learn value network (critic)
- Finally, combine combine policy and value networks in a Monte Carlo Tree Search algorithm to select actions by lookahead search

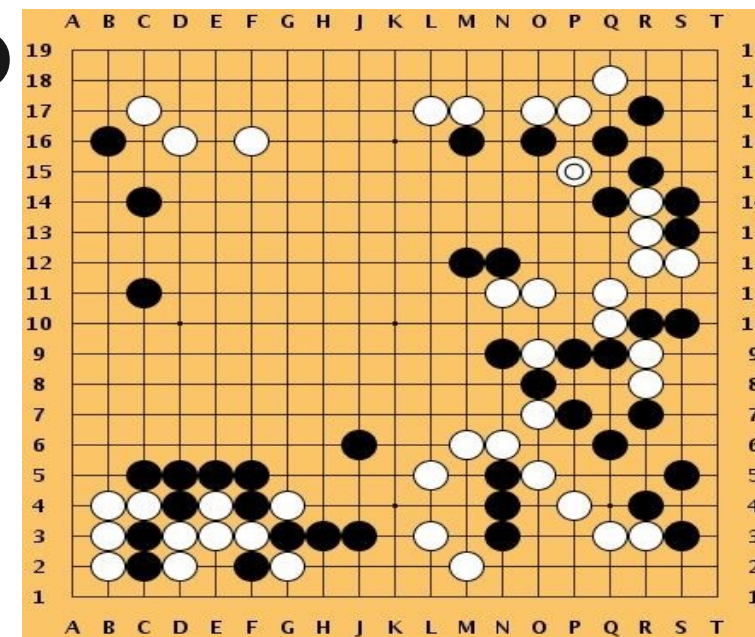

*[Silver et al.,
Nature 2016]*

This image is [CC0 public domain](#)

Key Takeaways

- Markov Decision Process (MDP)
- Q-learning
 - Bellman equation
 - Deep Q-learning, experience replay
- Policy gradients
- Guarantees:
 - Policy Gradients: Converges to a local minima of $J(\theta)$, often good enough!
 - Q-learning: Zero guarantees since you are approximating Bellman equation with a complicated function approximator

RL for text generation

Questions?